




APPLICATIONS & BENEFITS

- Flame retardant & abrasive resistant
- Electricity insulated matting
- Dielectric test voltage: 30,000 VAC
- Proof test over entire surface: 15,000 VAC
- Recommended max use voltage: 3,000 VAC
- U.S. Navy ship desks, surfaces, & walkways
- High voltage areas & surfaces
- Electrical work benches, substations & transformers

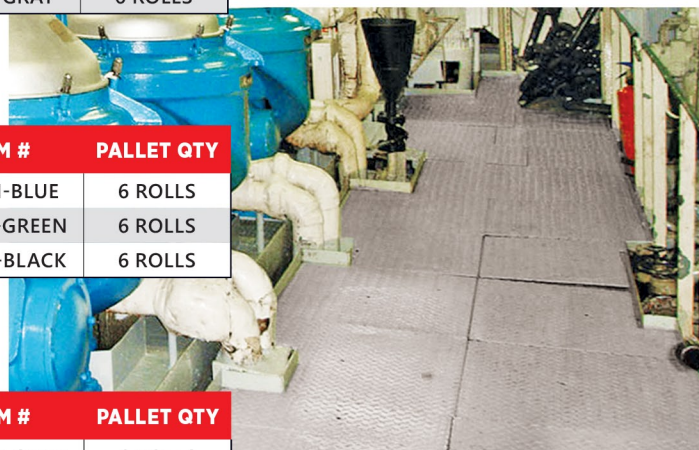

1/8" SMOOTH MARBLE

TYPE I MATTING

MATTING	COLOR	FINISH	ROLL SIZE	MIL SPEC - FR	ITEM #	PALLET QTY
TYPE I	BLUE	MARBLE	36" X 75'	MIL-DTL-15562G-FR	TYPE-I-BLUE	6 ROLLS
TYPE I	GREEN	MARBLE	36" X 75'	MIL-DTL-15562G-FR	TYPE-I-GREEN	6 ROLLS
TYPE I	BEIGE	MARBLE	36" X 75'	MIL-DTL-15562G-FR	TYPE-I-BEIGE	6 ROLLS
TYPE I	GRAY	MARBLE	36" X 75'	MIL-DTL-15562G-FR	TYPE-I-GRAY	6 ROLLS

1/8" SMOOTH SOLID

TYPE II MATTING

MATTING	COLOR	FINISH	ROLL SIZE	MIL SPEC - FR	ITEM #	PALLET QTY
TYPE II	BLUE	SOLID	36" X 75'	MIL-DTL-15562G-FR	TYPE-II-BLUE	6 ROLLS
TYPE II	GREEN	SOLID	36" X 75'	MIL-DTL-15562G-FR	TYPE-II-GREEN	6 ROLLS
TYPE II	BLACK	SOLID	36" X 75'	MIL-DTL-15562G-FR	TYPE-II-BLACK	6 ROLLS

3/16" SMOOTH SOLID

TYPE III MATTING

MATTING	COLOR	FINISH	ROLL SIZE	MIL SPEC - FR	ITEM #	PALLET QTY
TYPE III	GRAY	DIAMOND	36" X 75'	MIL-DTL-15562G-FR	TYPE-III-GRAY	6 ROLLS
TYPE III	GREEN	DIAMOND	36" X 75'	MIL-DTL-15562G-FR	TYPE-III-GREEN	6 ROLLS